

Contact-Cooled Rotary Screw Air Compressors

Nirvana 190-225 kW (250-300 hp)

Reliability

Efficiency

Productivity




More Than Air, Peace

Ingersoll Rand is well into its second century of building our legacy as a **trusted** global leader by delivering the **innovative** solutions and **expertise** our customers require. We continue to advance compressed air technology and service to maximise reliability, efficiency and productivity for our customers.

We not only provide world-class products and support, but the peace of mind that comes from our commitment to stand behind our customers in all aspects of what we do. That peace of mind allows our customers to focus on their primary objective: moving their businesses forward.



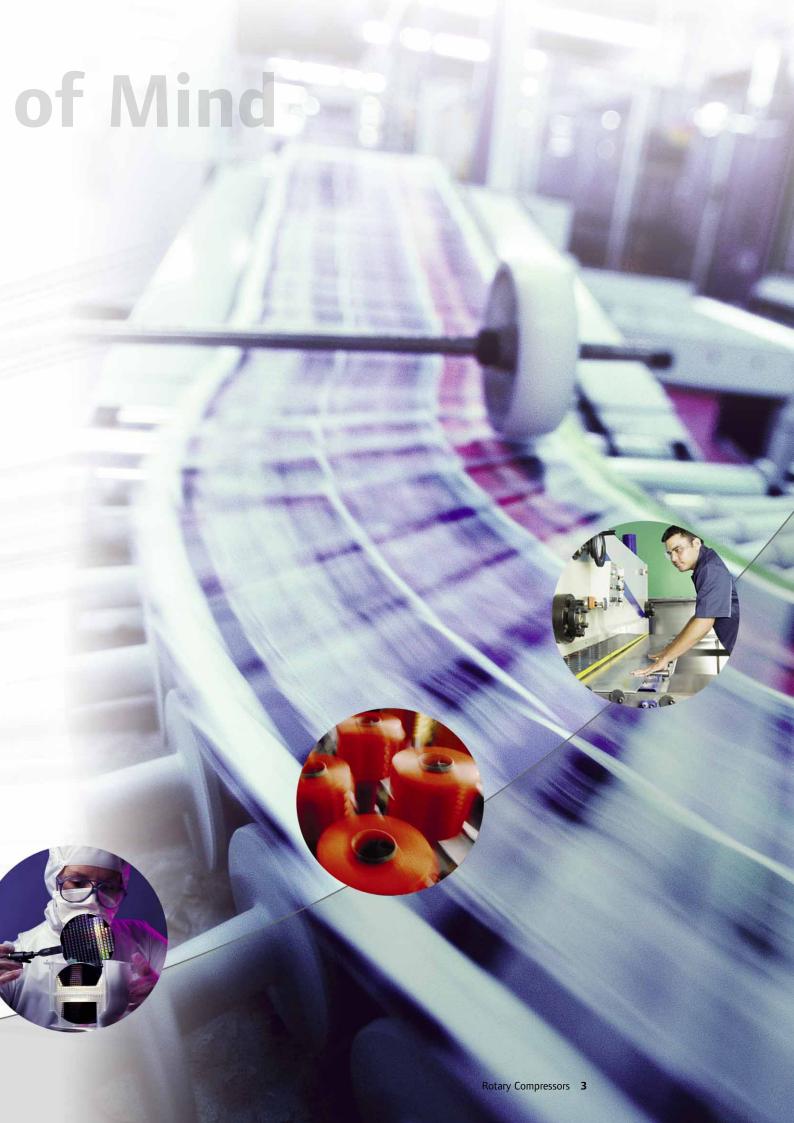

A New Level of Reliability, Efficiency and

Nirvana 190-225 kW rotary air compressors offer the very best of time-proven designs and technologies with new, advanced features that ensure the highest levels of **reliability, efficiency and productivity** available in their class today.

Time-proven Quality Airend

At the heart of all our Nirvana compressors is our rugged, roller bearing-equipped two-stage airend, engineered for exceptional reliability.

Patented Modular Drive for Maximum Productivity

Nirvana features an all new, compressor-specific frequency-inverter drive designed with the latest technology, while using standard components for easy repair and diagnosis.

- On-board drive diagnostics are easy to read on our Intellisys® microprocessor controller.
- Field-replaceable standard modular components in the unlikely event of failure.
- Easily diagnosed and serviced on-site by qualified Ingersoll Rand service personnel, eliminating downtime.
- 60% smaller than standard frequency inverters.
- Controlled soft start eliminates current surges, further extending component life and system reliability.



Variable Speed Cooling

Our system incorporates an intelligent cooling design, including positioning the after-cooler at the end of the package to allow cool compressed air that is only 8°C (15°F) above ambient to pass downstream to the air system.

- Eliminates thermal shock to components, reducing downtime.
- Consistent discharge temperature enhances system reliability.
- Energy consumption is matched to thermal load.
- Oversized components operate at 46°C (115°F), ensuring trouble-free operation in conditions that shut down most compressors, including those caused by dirty coolers.

Productivity



Lowest Cost of Ownership and Operation

Nirvana compressors lower the total cost of ownership and ongoing operating costs. For example, conventional compressors can draw 800% of the normal load at startup. Nirvana's Hybrid Permanent Magnet (HPM) motor limits the in-rush current to less than 100%, minimising peak charge readings and reducing energy bills. Nirvana simply reduces speed and volume to meet demand. And, rather than run unloaded, the compressor shuts off, whilst allowing unlimited starts per hour with no motor life decrease and plenty of energy savings.

Ingersoll Rand's Nirvana two-stage rotary screw air compressors can achieve energy savings of up to 15% over single stage units.

Maximum Efficiency at Virtually Any Load

At full load, the new Nirvana compressor delivers the most air, using the least energy. Conventional fixed speed compressors frequently produce extreme pressure fluctuations, including those outside their optimum range, greatly reducing efficiency. Nirvana compressors provide a true variable speed drive, delivering constant air pressure regardless of demand and achieving constant pressure and maximum efficiency across their entire operating range.

Easy Service, Easy Control

The Nirvana compressor package is remarkably uncluttered – it contains fewer components that need servicing than any other compressor, with everything readily accessible behind easily removable panels. And the intuitive Intellisys controller gives you complete, fingertip access to your compressor, including easily adjustable operating parameters and time-saving on-board diagnostics.

Innovative Design and Performance

More than a hundred years of advanced compressor design and manufacturing know-how have gone into the new Nirvana line. This industry-leading expertise and innovation are demonstrated by the exceptional levels of reliability and performance delivered by our new Nirvana compressors.

The New and The Proven

Nirvana rotary air compressors represent the ideal combination of Ingersoll Rand's proven technologies with our latest design enhancements. Our Nirvana premium efficiency compressor features Ingersoll Rand's time-tested two-stage airend, renowned for trouble-free operation and minimal maintenance.

- The Variable Frequency Drive (VFD) uses a standard inverter well recognised for providing dependable service in manufacturing operations around the world.
- Each airend incorporates a coolant dam that traps coolant in the bearing during shutdown to ensure proper lubrication during the critical start-up phase, and longer bearing life.
- High-quality duplex tapered roller bearings provide line contact for thrust loads dramatically extending airend life.
- Precision-machined rotors ensure unmatched rotor profile accuracy, repeatability and efficiency.



Reduced Bearing Loads

A lower compression ratio in each stage reduces bearing loads and increases airend life. High quality bearings ensure years of reliable, efficient service.

Nirvana's two-stage airend provides a combined energy savings of 33-41%!



Industry-leading Two-stage Performance

A Nirvana two-stage compressor outperforms any VFD compressor at full or partial load...it decreases energy costs by 22-30% over a fixed speed compressor...delivers 11-15% more air than a single-stage compressor...and yields 33-41% total energy savings. That's performance you can bank on! One of the keys to the two-stage's efficiency is the coolant curtain. Significant air cooling is achieved by injecting atomised oil into the compressed air stream leaving the first stage. This lowers the energy required for second-stage compression whilst eliminating the need for an intercooler.


More Air, Less Energy

Our high-efficiency HPM motor produces more air across a wider operating range with no increase in power consumption. The motor's unique permanent magnet design allows it to run at 95% efficiency throughout the entire speed range versus the typical induction motor, which detereates significantly with speed.

- Uses four times as many poles and generates 33% more magnetic flux than the traditional motor for premium efficiency and power factor.
- Has two times the air gap for increased cooling enabling unlimited starts and stops, which turns Nirvana off rather than running it unloaded, saving energy.

Long-life Lubricant: 8,000 Hours Between Changes

With Nirvana, you typically need to change our Ultra Coolant only after 8,000 hours of operation...that's typically two years between change outs. This means more uptime and lower coolant costs.

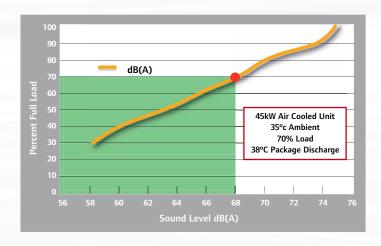



A Coolant Conditioner for Optimum Thermal Discharge and Performance

The unique Nirvana Coolant Conditioner matches the performance of the cooling system to that of the ambient air temperature, maximises bearing life, lowers energy consumption cost and keeps noise levels to a whisper - typically as low as 59-67 dB(A). What's more, the VFD on the Nirvana coolant circuit eliminates the life-shortening build-up of moisture in the coolant at partial loads common with other VFD compressors.

Leak-Free...by Design

By using SAE O-rings on connections, we have significantly reduced potential leakage problems associated with conventional compressors. Our quality and design combine to make the Nirvana virtually leak free... further adding to the reliability of this remarkable compressor.

A Configuration For Every Need

Airend Premium two-stage airend with duplex tapered roller bearings Standard Controller Energy-saving microprocessor controller On-board diagnostics and shutdown protection Standard Easy to use operator interface in 27 languages Standard Programmable start/stop operation Standard Easy to use operator interface in 27 languages Standard Remote connectivity to building management system Standard Integral sequencing control for up to four units Standard Integral sequencing control for up to four units Standard Energy-efficient, low noise cooling system Standard Energy-efficient, low noise cooling system optimised for efficiency & serviceability Standard Energy-efficient, low noise cooling system rated for 46°C (115°F) Standard High efficiency package cooling system rated for 46°C (115°F) Standard Details of the prevention Services Electroic package warranty Standard Auxiliary Systems Noise reduction enclosure Standard Electronic no loss condensate drains Standard Electronic no loss condensate drains Standard Motors & Hybrid Permanent Magnet motor (HPM) Standard Motors & Electrical Systems Control panel protection NEMA 12/IP54 Standard Electrical Systems			
Controller Energy-saving microprocessor controller On-board diagnostics and shutdown protection Easy to use operator interface in 27 languages Standard Programmable start/stop operation Selectable units of measurement display Remote connectivity to building management system Integral sequencing control for up to four units Built-in energy savings calculator Standard Integral sequencing control for up to four units Standard Air-cooled end-to-end cooling system optimised for efficiency & serviceability Standard Energy-efficient, low noise cooling system High efficiency package cooling system rated for 46°C (115°F) Standard Water cooling Optional Leak Prevention Services Fluid containment system Standard Simple ducting 12-month full package warranty Noise reduction enclosure Electronic no loss condensate drains Long life air and separator filters (4,000 hours) Standard Motors & Hybrid Permanent Magnet motor (HPM) Standard Control panel protection NEMA 12/IP54 Standard Control panel protection NEMA 12/IP54 Standard	Category	Description	Variable Speed
On-board diagnostics and shutdown protection Easy to use operator interface in 27 languages Programmable start/stop operation Selectable units of measurement display Remote connectivity to building management system Integral sequencing control for up to four units Standard Built-in energy savings calculator Cooling System Air-cooled end-to-end cooling system optimised for efficiency & serviceability Energy-efficient, low noise cooling system High efficiency package cooling system rated for 46°C (115°F) Standard High efficiency package cooling system rated for 46°C (115°F) Standard Eak-free prevention connections with SAE O-ring fittings Standard Simple ducting Standard Auxiliary Systems Noise reduction enclosure Electronic no loss condensate drains Long life air and separator filters (4,000 hours) Standard Motors & Hybrid Permanent Magnet motor (HPM) Standard Control panel protection NEMA 12/IP54 Standard Control panel protection NEMA 12/IP54 Standard Standard Control panel protection NEMA 12/IP54	Airend	Premium two-stage airend with duplex tapered roller bearings	Standard
Easy to use operator interface in 27 languages Programmable start/stop operation Selectable units of measurement display Remote connectivity to building management system Integral sequencing control for up to four units Standard Integral sequencing control for up to four units Built-in energy savings calculator Standard Cooling System Air-cooled end-to-end cooling system optimised for efficiency & serviceability Standard Energy-efficient, low noise cooling system Fligh efficiency package cooling system rated for 46°C (115°F) Water cooling Water cooling Fluid containment system Standard Simple ducting 12-month full package warranty Standard Auxiliary Systems Noise reduction enclosure Electronic no loss condensate drains Long life air and separator filters (4,000 hours) Standard Motors & Electrical Systems Control panel protection NEMA 12/IP54 Standard Control panel protection NEMA 12/IP54 Standard Standard Control panel protection NEMA 12/IP54 Standard Standard Standard Control panel protection NEMA 12/IP54 Standard	Controller	Energy-saving microprocessor controller	Standard
Programmable start/stop operation Selectable units of measurement display Remote connectivity to building management system Integral sequencing control for up to four units Built-in energy savings calculator Standard Air-cooled end-to-end cooling system optimised for efficiency & serviceability Energy-efficient, low noise cooling system optimised for efficiency & serviceability High efficiency package cooling system rated for 46°C (115°F) Standard High efficiency package cooling system rated for 46°C (115°F) Standard Optional Leak-free prevention connections with SAE O-ring fittings Standard Simple ducting Standard Simple ducting 12-month full package warranty Standard Auxiliary Systems Noise reduction enclosure Electronic no loss condensate drains Long life air and separator filters (4,000 hours) Standard Motors & Electrical Systems Control panel protection NEMA 12/IP54 Standard Standard Control panel protection NEMA 12/IP54 Standard Standard Standard Standard Control panel protection NEMA 12/IP54 Standard Standard Standard Control panel protection NEMA 12/IP54		On-board diagnostics and shutdown protection	Standard
Selectable units of measurement display Remote connectivity to building management system Integral sequencing control for up to four units Built-in energy savings calculator Standard Air-cooled end-to-end cooling system optimised for efficiency & serviceability Fandard Energy-efficient, low noise cooling system High efficiency package cooling system rated for 46°C (115°F) Standard Water cooling Uteak Prevention Services Leak-free prevention connections with SAE O-ring fittings Fluid containment system Simple ducting Simple ducting 12-month full package warranty Standard Auxiliary Systems Noise reduction enclosure Electronic no loss condensate drains Long life air and separator filters (4,000 hours) Standard Motors & Hybrid Permanent Magnet motor (HPM) Standard Control panel protection NEMA 12/IP54 Standard Standard Standard Standard Control panel protection NEMA 12/IP54 Standard Standard		Easy to use operator interface in 27 languages	Standard
Remote connectivity to building management system Integral sequencing control for up to four units Standard Built-in energy savings calculator Standard Air-cooled end-to-end cooling system optimised for efficiency & serviceability Energy-efficient, low noise cooling system Standard High efficiency package cooling system rated for 46°C (115°F) Water cooling Optional Leak Prevention Services Fluid containment system Standard Simple ducting Standard Simple ducting 12-month full package warranty Standard Auxiliary Systems Noise reduction enclosure Electronic no loss condensate drains Long life air and separator filters (4,000 hours) Standard Motors & Hybrid Permanent Magnet motor (HPM) Standard Control panel protection NEMA 12/IP54 Standard Standard	•	Programmable start/stop operation	Standard
Integral sequencing control for up to four units Built-in energy savings calculator Standard Air-cooled end-to-end cooling system optimised for efficiency & serviceability Energy-efficient, low noise cooling system High efficiency package cooling system rated for 46°C (115°F) Standard Water cooling Ueak-free prevention connections with SAE O-ring fittings Standard Simple ducting Standard 12-month full package warranty Standard Auxiliary Systems Noise reduction enclosure Electronic no loss condensate drains Long life air and separator filters (4,000 hours) Standard Motors & Hybrid Permanent Magnet motor (HPM) Control panel protection NEMA 12/IP54 Standard Standard Standard Standard Control panel protection NEMA 12/IP54		Selectable units of measurement display	Standard
Built-in energy savings calculator Air-cooled end-to-end cooling system optimised for efficiency & serviceability Standard Energy-efficient, low noise cooling system Standard High efficiency package cooling system rated for 46°C (115°F) Standard Water cooling Optional Leak Prevention Services Fluid containment system Standard Simple ducting Standard 12-month full package warranty Standard Auxiliary Systems Noise reduction enclosure Standard Electronic no loss condensate drains Standard Long life air and separator filters (4,000 hours) Standard 8,000-hr life Ultra Coolant Standard Motors & Hybrid Permanent Magnet motor (HPM) Standard Control panel protection NEMA 12/IP54 Standard Control panel protection NEMA 12/IP54 Standard	•	Remote connectivity to building management system	Standard
Air-cooled end-to-end cooling system optimised for efficiency & serviceability Energy-efficient, low noise cooling system High efficiency package cooling system rated for 46°C (115°F) Water cooling Optional Leak Prevention Services Leak-free prevention connections with SAE O-ring fittings Fluid containment system Standard Simple ducting 12-month full package warranty Standard Noise reduction enclosure Electronic no loss condensate drains Long life air and separator filters (4,000 hours) 8,000-hr life Ultra Coolant Motors & Hybrid Permanent Magnet motor (HPM) Control panel protection NEMA 12/IP54 Standard Standard Standard Control panel protection NEMA 12/IP54 Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Control panel protection NEMA 12/IP54 Standard Standard Standard Control panel protection NEMA 12/IP54		Integral sequencing control for up to four units	Standard
Energy-efficient, low noise cooling system High efficiency package cooling system rated for 46°C (115°F) Water cooling Optional Leak Prevention Services Fluid containment system Standard Simple ducting 12-month full package warranty Standard Auxiliary Systems Noise reduction enclosure Electronic no loss condensate drains Long life air and separator filters (4,000 hours) 8,000-hr life Ultra Coolant Motors & Hybrid Permanent Magnet motor (HPM) Control panel protection NEMA 12/IP54 Standard Standard Standard Standard Control panel protection NEMA 12/IP54 Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard	•	Built-in energy savings calculator	Standard
High efficiency package cooling system rated for 46°C (115°F) Water cooling Optional Leak Prevention Services Fluid containment system Simple ducting 12-month full package warranty Noise reduction enclosure Flectronic no loss condensate drains Long life air and separator filters (4,000 hours) Standard Motors & Hybrid Permanent Magnet motor (HPM) Control panel protection NEMA 12/IP54 Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard	Cooling System	Air-cooled end-to-end cooling system optimised for efficiency & serviceability	Standard
Water coolingOptionalLeak Prevention ServicesLeak-free prevention connections with SAE O-ring fittingsStandard ◀Simple ductingStandard ◀12-month full package warrantyStandard ◀Auxiliary SystemsNoise reduction enclosureStandard ◀Electronic no loss condensate drainsStandard ◀Long life air and separator filters (4,000 hours)Standard ◀Motors & Electrical SystemsHybrid Permanent Magnet motor (HPM)Standard ◀Electrical SystemsControl panel protection NEMA 12/IP54Standard ◀		Energy-efficient, low noise cooling system	Standard
Leak-free prevention connections with SAE O-ring fittings Fluid containment system Simple ducting 12-month full package warranty Standard Noise reduction enclosure Electronic no loss condensate drains Long life air and separator filters (4,000 hours) 8,000-hr life Ultra Coolant Motors & Hybrid Permanent Magnet motor (HPM) Electrical Systems Control panel protection NEMA 12/IP54 Standard Standard Control panel protection NEMA 12/IP54		High efficiency package cooling system rated for 46°C (115°F)	Standard
Fluid containment system Simple ducting 12-month full package warranty Standard 12-month full package warranty Standard Noise reduction enclosure Electronic no loss condensate drains Long life air and separator filters (4,000 hours) Standard Notors & Hybrid Permanent Magnet motor (HPM) Standard Control panel protection NEMA 12/IP54 Standard Motors & Hybrid Permanent Magnet motor (HPM) Standard Standard Standard Standard Standard Standard Standard Notors & Hybrid Permanent Magnet motor (HPM)		Water cooling	Optional
Simple ducting Simple ducting 12-month full package warranty Standard Noise reduction enclosure Electronic no loss condensate drains Long life air and separator filters (4,000 hours) 8,000-hr life Ultra Coolant Motors & Hybrid Permanent Magnet motor (HPM) Electrical Systems Standard Control panel protection NEMA 12/IP54 Standard Motors & Hybrid Permanent Magnet motor (HPM) Standard Standard Standard Standard Standard Standard Standard Standard Motors & Hybrid Permanent Magnet motor (HPM)	Leak Prevention	Leak-free prevention connections with SAE O-ring fittings	Standard
Auxiliary Systems Noise reduction enclosure Electronic no loss condensate drains Long life air and separator filters (4,000 hours) 8,000-hr life Ultra Coolant Motors & Hybrid Permanent Magnet motor (HPM) Electrical Systems Standard Control panel protection NEMA 12/IP54 Standard Standard Standard Standard Standard Standard Standard Standard Control panel protection NEMA 12/IP54	Services	Fluid containment system	Standard
Auxiliary SystemsNoise reduction enclosureStandard ◀Electronic no loss condensate drainsStandard ◀Long life air and separator filters (4,000 hours)Standard ◀8,000-hr life Ultra CoolantStandard ◀Motors & Electrical SystemsHybrid Permanent Magnet motor (HPM)Standard ◀Control panel protection NEMA 12/IP54Standard ◀		Simple ducting	Standard
Electronic no loss condensate drains Long life air and separator filters (4,000 hours) 8,000-hr life Ultra Coolant Standard Motors & Hybrid Permanent Magnet motor (HPM) Standard Control panel protection NEMA 12/IP54 Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard		12-month full package warranty	Standard
Long life air and separator filters (4,000 hours)Standard ◀8,000-hr life Ultra CoolantStandard ◀Motors & Electrical SystemsHybrid Permanent Magnet motor (HPM)Standard ◀Control panel protection NEMA 12/IP54Standard ◀	Auxiliary Systems	Noise reduction enclosure	Standard
8,000-hr life Ultra Coolant Motors & Hybrid Permanent Magnet motor (HPM) Electrical Systems Standard Control panel protection NEMA 12/IP54 Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Standard Stan		Electronic no loss condensate drains	Standard
Motors & Electrical SystemsHybrid Permanent Magnet motor (HPM)Standard ◀Control panel protection NEMA 12/IP54Standard ◀		Long life air and separator filters (4,000 hours)	Standard
Electrical Systems Control panel protection NEMA 12/IP54 Standard ◀		8,000-hr life Ultra Coolant	Standard
Control patier protection NEWA 12/1134	Motors &	Hybrid Permanent Magnet motor (HPM)	Standard
	Electrical Systems	Control panel protection NEMA 12/IP54	Standard
Variable frequency drive on main motor and fan motor Standard		Variable frequency drive on main motor and fan motor	Standard
Environmental Energy recovery system Optional	Environmental	Energy recovery system	Optional
X-tend food-grade coolant Optional		X-tend food-grade coolant	Optional
X-tend filtration system Optional		X-tend filtration system	Optional
Power Protection Power Outage Restart Option (PORO) Optional	Power Protection	Power Outage Restart Option (PORO)	Optional
Phase monitor Optional		Phase monitor	Optional
General Options Comprehensive service and coverage plan Optional	General Options	Comprehensive service and coverage plan	Optional

Contact your Ingersoll Rand representative for more information.

50 Hz Performance										
Rated Pressure		Nominal Power		Capacity		Weight				
Model	bar g	psig	kW	hp	m³/min	cfm	kg			
R190ne	7.5	110	205	275	37.6	1,327	5,933			
	8.5	125	192	257	33.1	1,170	5,933			
	10.0	145	205	275	32.3	1,141	5,933			
R225ne	7.5	110	246	330	44.7	1,580	5,933			
	8.5	125	246	330	41.8	1,476	5,933			
	10.0	145	246	330	40.4	1,425	5,933			

Dimensions	mm	
Length	4000	
Width	1930	
Height	2146	



Ingersoll Rand Ultra Care

Helping you maintain a healthy business

Ultra Care five year maintenance and performance agreements have been designed to be easy to understand with absolutely no surprises.

Find out more about protecting the heart of your business contact your local distributor or Ingersoll Rand Sales office.



Total Air Solution Expertise

Operating a group of compressors as a single efficient system requires the kind of control and balance only Ingersoll Rand can deliver. Our advanced system controllers and audit services enable you to optimise efficiency, extend the life of system components and reduce energy costs.

Cut Operating Costs with Your Existing Equipment!

Ingersoll Rand X-Series System Automation eliminates waste by managing up to 12 positive displacement compressors simultaneously...regardless of capacity, type (fixed speed, variable speed, variable capacity), combination or configuration.


Through advanced control functionality and universal connectivity, our X-Series System Automation products work with any compressors, from Ingersoll Rand or any manufacturer, to improve operating efficiency and reduce energy costs.

Intelliflow Air System Pressure Controller

Intelliflow provides precise air pressure control of production processes by separating supply-side air from demand-side air so that supply-side air is not affected by events on the demand side. Intelliflow can lower demand pressure precisely—reducing energy costs and better ensuring consistent product quality.



From compressors to system automation and everything in between, Ingersoll Rand is your supplier of choice.

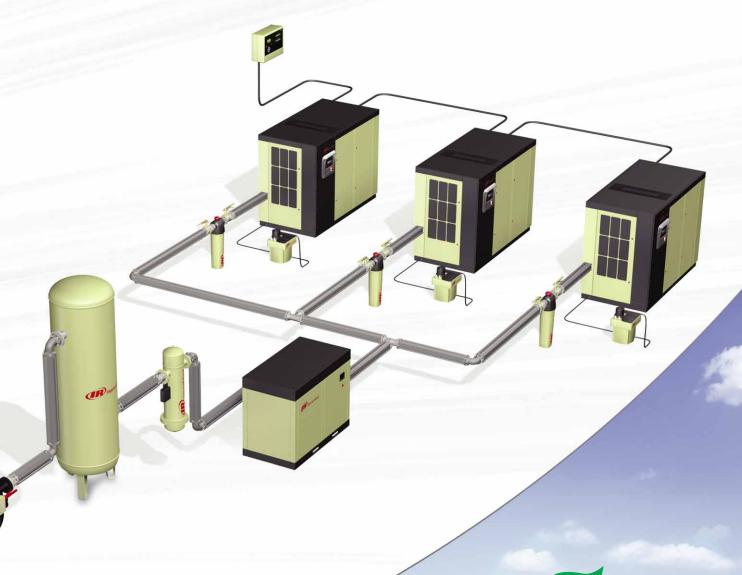

Progress is greener with Ingersoll Rand

Ingersoll Rand offers industry leading products and solutions that enable businesses around the world to reduce energy consumption and costs and decrease harmful environmental emissions. From air compressors that reduce energy consumption to electric-powered golf cars with near-zero emissions, Ingersoll Rand provides the knowledge, experience and solutions to help our clients achieve their sustainability goals.



Ingersoll Rand Industrial Technologies provides products, services and solutions that enhance our customers' energy efficiency, productivity and operations. Our diverse and innovative products range from complete compressed air systems, tools and pumps to material and fluid handling systems and environmentally friendly microturbines. We also enhance productivity through solutions created by Club Car®, the global leader in golf and utility vehicles for businesses and individuals.

www.ingersollrandproducts.com

Ingersoll Rand Industrial Technologies Swan Lane, Hindley Green Wigan WN2 4EZ, UK Tel: +44 (0) 1942 257171

Fax: +44 (0) 1942 254162 Email: asgesawebleads@irco.com





Ingersoll Rand compressors are not designed, intended or approved for breathing air applications. Ingersoll Rand does not approve specialised equipment for breathing air applications and assumes no responsibility or liability for compressors used for breathing air service.

Nothing contained on these pages is intended to extend any warranty or representation, expressed or implied, regarding the product described herein. Any such warranties or other terms and conditions of sale of product shall be in accordance with Ingersoll Rand's standard terms and conditions of sale for such products, which are available upon request.

Product improvement is a continuing goal at Ingersoll Rand. Designs and specifications are subject to change without notice or obligation.